

KD Wall Rack

ASSEMBLY INSTRUCTIONS

Lay out the parts as shown.

Attach the eight (8) 2" bolts.


Phillips head bolts are for the two inside racks top and bottom.

Hex head bolts are for the two outside racks top and bottom.

Install the four (4) plastic cap plugs by tapping them into the exposed ends of the top and bottom tubes.

Mount the unit to the wall using the appropriate hardware.

To function properly this unit MUST be mounted to a wall.

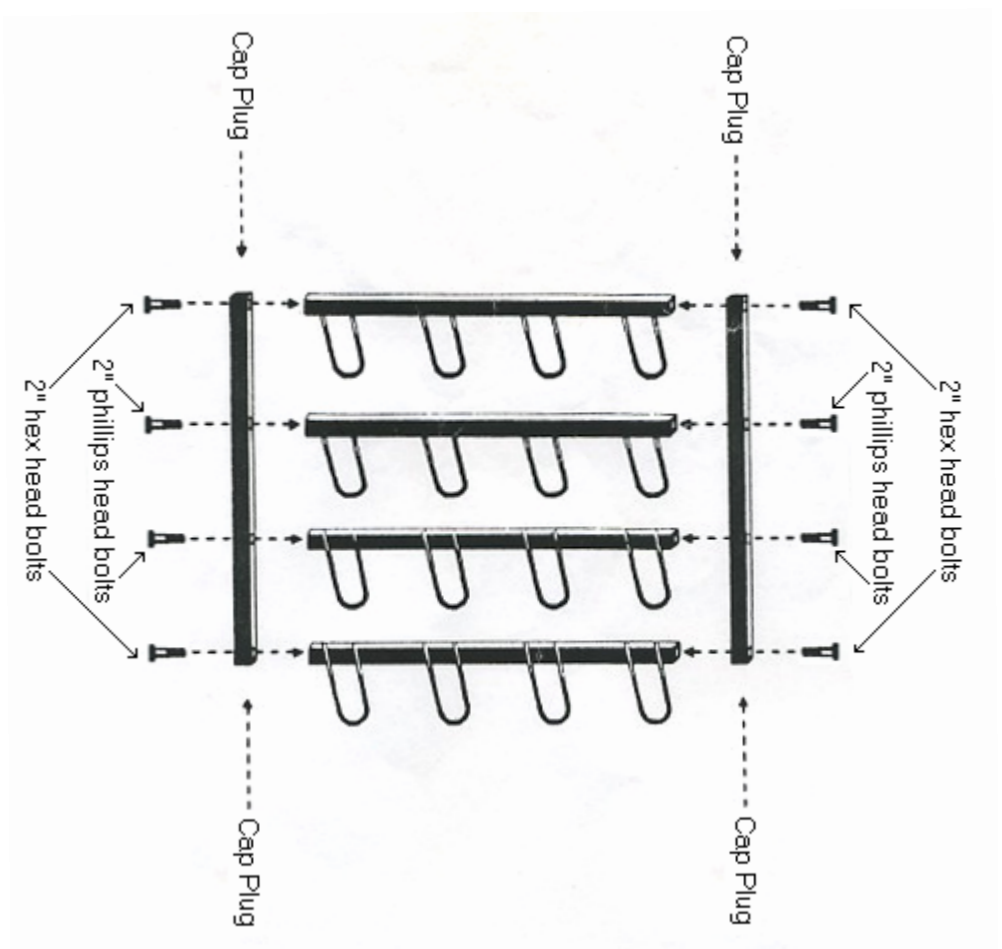

Contact manufacturer for questions,
comments or problems:

METALCRAFT INDUSTRIES, INC.
120 Cypress Road, Ocala, FL 34472
(352) 680-3555 (352) 680-3559

www.metalcraftindustries.net